

8860

S E R I E S

**MORTISE LATCHING
EXIT DEVICE**
with INSET Push Bar

ANSI/BHMA GRADE 1 –
UL/ULC Listed for UL305
Panic Hardware

Suitable for Narrow, Medium,
and Wide Stile Doors¹
¹Minimum stile size of 2"

Standard Door Widths
36", 42", 48"

**48" width
can be trimmed
down to 36"**

For widths less than 36"
Consult Factory



Standard 36" Device Shown

Fully concealed fasteners backside of device!

Functions:

- Designed for simple prep and installation
- Attractive low profile design
- Extruded aluminum body in standard anodized finishes
- Non-handed
- Hex key dogging standard
- Device projection of 3"
- Push bar remains 24"

Options:

- **Electric Latch Retraction**
Motorized mechanism for fast, quiet operation capable of continuous duty.
- **Interior Key Cylinder Dogging**




Includes heavy duty mortise,
deadlatching lockset

Lock Backsets available in
31/32", 1-1/8", 1-1/2"

Device height of 2-1/2"

Device projection 3"

Standard door thickness 1-3/4"

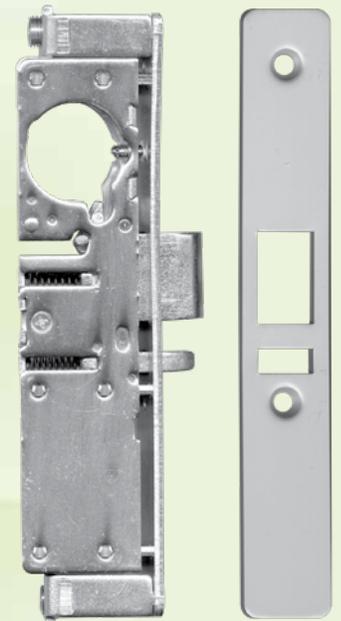

8860 Series is available
with Built-in 24vDC 1 Amp
Motor Driven Electronic
Latch Retraction or as a
Retro Fit Kit MEL3000-1



8860

S ■ E ■ R ■ I ■ E ■ S

PART NUMBERING

A/8860/B-C/D/E/F

SAMPLE NUMBER

MEL886036-CLR01S1

OPTIONS

(A) ACCESSORIES

MEL = Motorized Electric
Latch Retraction

(B) DOOR WIDTH

36 = 36" (standard)
48 = 48"

(C) FINISH

CL = Clear
BR = Dark Bronze
BL = Black

(D) FINISH

R = Right Hand
L = Left Hand

(E) BACKSET

01 = 3/32"
02 = 1-1/8"
03 = 1-1/2"

(F) STRIKE TYPE

S1 = 2" Standard
S2 = 3" Extended
S3 = 4" Tall Strike